

Multifunctional domotics actuator





## 


Patent pending

## **ON® technology**

In a world where technology is increasingly intertwined with every aspect of our daily lives, it is essential that home automation devices are simple to use, saving time instead of stealing it. This is where **OMNIBOX** comes in, the perfect answer to the excessive complexity of current home automation products.

**OMNIBOX** is more than just a device: it is your personal assistant, designed to simplify installation and use.

The advanced automation and connectivity features have been designed to adapt perfectly to your needs, allowing you to create custom scenarios that will transform the way you live your home.

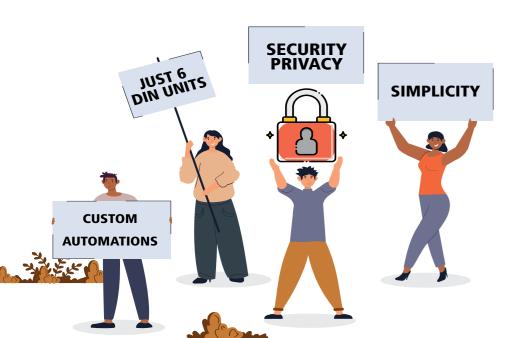

## **OMNIBOX**



THERMOREGULATION



VALVE CONTROL WATER, GAS, ETC.



APPLIANCES MANAGEMENT



AUTOMATIONS BASED ON INPUT BEHAVIOUR



OPENING/CLOSING GARAGE, GATES, ETC.



**AUTOMATIONS BASED** 

ON DAY & TIME

**SUNRISE & SUNSET** 

ALARMS



MULTIMEDIA APPLIANCES MANAGEMENT



FIRE

Imagine a world where installation and configuration are a piece of cake, without lengthy and complicated procedures.

With **OMNIBOX**, every detail has been optimized to give you an intuitive experience, whether you are an experienced installer or the User.

**OMNIBOX** represents the cutting edge of home automation technology, proposing a revolutionary vision that puts Man at the center of the project. Forget the tedious routine of repetitive tasks: with a simple tap, you'll be able to handle all the daily tasks, reserving more time for what really matters. In addition, we have dedicated special attention to the creation of a user-friendly interface that makes interaction with **OMNIBOX** a real pleasure.

We are ready to guide you into a new era of home automation, where technology blends harmoniously with your life, enriching it, not complicating it.

Welcome to the future of domotics

Welcome in the world of ON® technology









Quick and easy setup, directly from Smartphone!



## **SPECIFICATIONS**

Input 4 clean contacts

5mm step screw clamps

Output 4 relays 10A/250V AC

Overvoltage 8000V

High break down voltage 4000

Connectivity Integrated access point Wi-Fi

Wi-Fi, LAN Ethernet

Interface Web

Installation DIN rail

Footprint 6 Modules

Power Supply 12V DC

Size 105 x 95 x 35

(LxAxP mm)

Weight (Kg) 0,200





www.oysternext.com oysternext@oysternext.com



